

System design

REVOPUR® WSP 8

Sealing under tiles

Areas of application


Surfaces to be walked on
Balconies/terraces
Porches

Properties

Layer thickness system: > 13 mm

System design

- ① **Substrates**
may need to be pre-treated
(e.g. concrete)
- ② **Primer**
PR100 (PUA-Grundierung)
2-component, solvent-free,
fast-curing primer
for mineral substrates
Coverage: approx. 300-500 g/m²
- ③ **Seal**
REVOPUR® WP200
2-component, fast-curing,
solvent-free sealant
for surfaces and extensions
with fleece
Coverage: approx. 3.00 kg/m²
- ④ **Intermediate layer**
REVOPUR® TC300
2-component, solvent-free
intermediate layer/wear layer
for sprinkling quartz sand
and fine-grain granite granules
Coverage: approx. 200 g/m²
- ⑤ **Sprinkling**
Quarzsand
Quarz sand
Grain size 0.7-1.2 mm
Coverage: approx. 3.50 kg/m²
- ⑥ Adhesive tiles

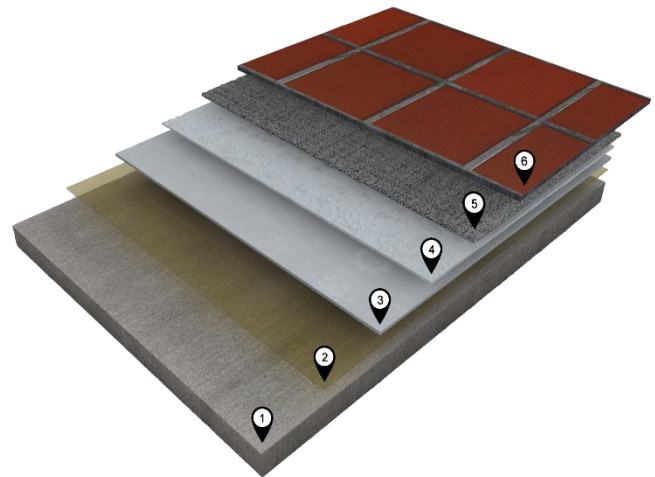

The proposed construction is a proposal. This does not release the contractor/customer from the obligation to carry out an independent check or to point this out to the client. Furthermore, this proposal does not exempt you from submitting it to a special expert, architect or engineer for final approval. FRANKEN SYSTEMS GmbH does not provide a corresponding planning service or planning activity along with the proposal. The proposal is also not to be treated as an approved, detailed item. Copying or transferring this document (including excerpts) in an unauthorised manner is not permitted.