

System design

REVOPUR® SPS 18

Mechanically resilient, coloured thick coating with anti-slip floor coating

Areas of application


Surfaces to be walked on
Balconies/terraces
Porches

Properties

Layer thickness system: 3-4 mm
Slip resistance class: R9/R10
Easy to clean
High resilience

System design

- ① **Substrates**
may need to be pre-treated
(e.g. concrete)
 - ② **Primer**
PR100 (PUA-Grundierung)
2-component, solvent-free,
fast-curing primer
for mineral substrates
Coverage: approx. 300-500 g/m²
 - ③ **Thick coating**
REVOPUR® TC360
2-component, non-fading,
solvent-free, fast-curing
coating
with
REVOPUR® Quarzsandmischung
Component C
Quartz sand mix with different grain sizes
Mixing ratio 1:1
Coverage: approx. 3.50-4.00 kg/m²
 - ④ **Thin coating**
REVOPUR® TC360
2-component, non-fading,
solvent-free, fast-curing
coating
with
REVOPUR® Glasperlenmischung
Glass bead mix 0.4 mm
Mixing ratio 1:10
Coverage: approx. 250-300 g/m² for R9
- Sprinkling (for R10)**
REVOPUR® Colorchips (SMALL)
Colour chips for the decorative
design of the surface
Coverage: approx. 5 g/m²

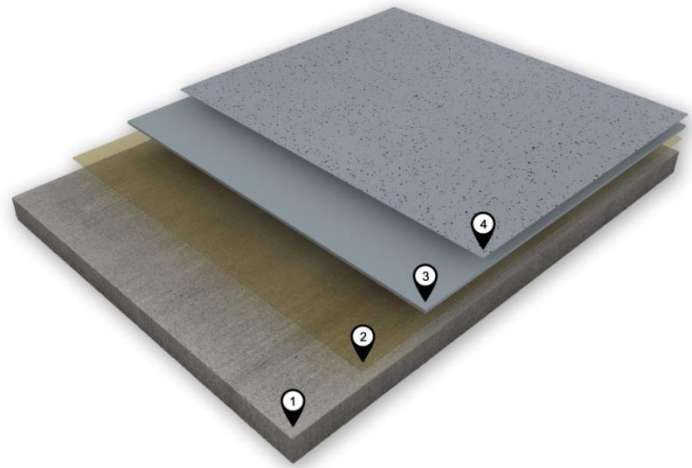

The proposed construction is a proposal. This does not release the contractor/customer from the obligation to carry out an independent check or to point this out to the client. Furthermore, this proposal does not exempt you from submitting it to a special expert, architect or engineer for final approval. FRANKEN SYSTEMS GmbH does not provide a corresponding planning service or planning activity along with the proposal. The proposal is also not to be treated as an approved, detailed item. Copying or transferring this document (including excerpts) in an unauthorised manner is not permitted.