

System design

REVOPUR® WSP 11

Sealing with quartz sand with pigmented coating

Areas of application

Surfaces to be walked on
Slip-resistant decor solutions
Balconies/terraces


Properties

Layer thickness system: 4-5 mm
Slip resistance class: R11

System design

- ① Substrates
may need to be pre-treated
(e.g. concrete)
- ② Primer
PR100 (PUA-Grundierung)
2-component, solvent-free,
fast-curing primer
for mineral substrates
Coverage: approx. 300-500 g/m²)
- ③ Seal
REVOPUR® WP 200
2-component, fast-curing,
solvent-free sealant
for surfaces and extensions
with fleece
Coverage: approx. 3.00 kg/m²

Fleece joint transitions
REVOPUR® WP Armierungsstreifen
Glass fabric for fleece
- ④ Intermediate layer
REVOPUR® TC300
2-component, solvent-free
intermediate layer/wear layer
for sprinkling quartz sand
and fine-grain granite granules
Coverage: approx. 200 g/m²
- ⑤ Sprinkling
Quarzsand
Quarz sand
Grain size 0.7-1.2 mm or 0.3-0.9 mm
Coverage: approx. 3.50 kg/m²
- ⑥ Pigmented coating
REVOPUR® TC360
2-component, non-fading,
solvent-free, fast-curing
coating
Coverage: approx. 400 g/m²

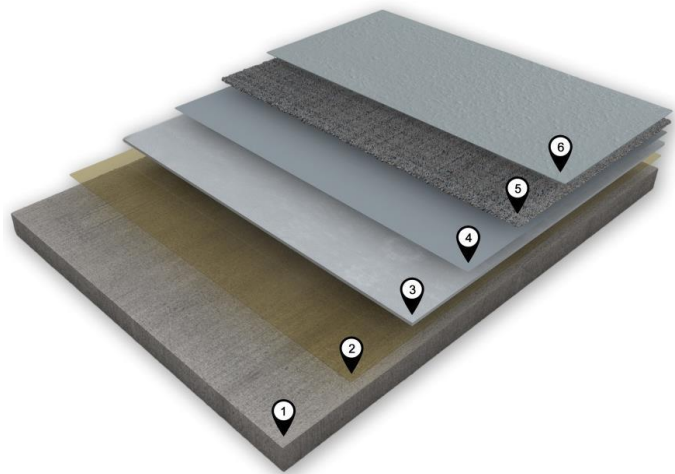

The proposed construction is a proposal. This does not release the contractor/customer from the obligation to carry out an independent check or to point this out to the client. Furthermore, this proposal does not exempt you from submitting it to a special expert, architect or engineer for final approval. FRANKEN SYSTEMS GmbH does not provide a corresponding planning service or planning activity along with the proposal. The proposal is also not to be treated as an approved, detailed item. Copying or transferring this document (including excerpts) in an unauthorised manner is not permitted.