

System design

# REVOPUR® SPS 11

Quartz sand with pigmented coating

## Areas of application


Surfaces to be walked on  
Balconies/terraces  
Porches

## Properties

Layer thickness system: 2-3 mm  
Slip resistance class: R11

## System design

- ① Substrates  
may need to be pre-treated  
(e.g. concrete)
- ② Primer  
**PR100 (PUA-Grundierung)**  
2-component, solvent-free,  
fast-curing primer  
for mineral substrates  
Coverage: approx. 300-500 g/m<sup>2</sup>
- ③ Intermediate layer  
**REVOPUR® TC300**  
2-component, solvent-free  
intermediate layer/wear layer  
for sprinkling quartz sand  
and fine-grain granite granules  
Coverage: approx. 200 g/m<sup>2</sup>
- ④ Sprinkling  
**Quarzsand**  
Quartz sand  
Grain size 0.7-1.2 mm or  
0.3-0.9 mm  
Coverage: approx. 3.50 kg/m<sup>2</sup>
- ⑤ Pigmented coating  
**REVOPUR® TC360**  
2-component, non-fading,  
solvent-free, fast-curing  
coating  
Coverage: approx. 400 g/m<sup>2</sup>

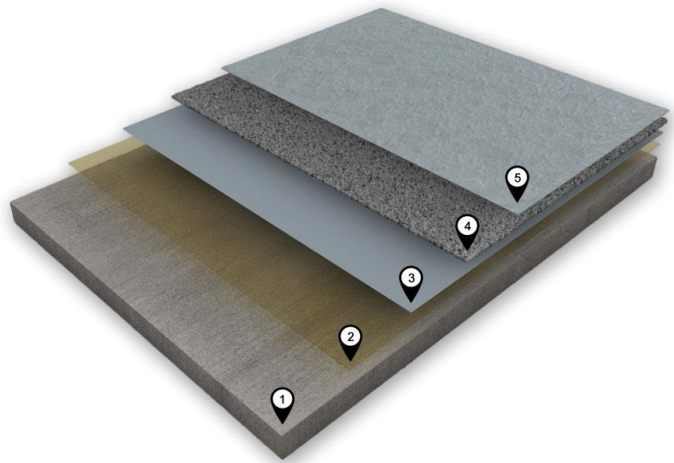

The proposed construction is a proposal. This does not release the contractor/customer from the obligation to carry out an independent check or to point this out to the client. Furthermore, this proposal does not exempt you from submitting it to a special expert, architect or engineer for final approval. FRANKEN SYSTEMS GmbH does not provide a corresponding planning service or planning activity along with the proposal. The proposal is also not to be treated as an approved, detailed item. Copying or transferring this document (including excerpts) in an unauthorised manner is not permitted.